

Medium Duty Spring Retractable Reels

Air/Water/Oil - 1/4", 3/8", 1/2" I.D.




- Spool is constructed from a rugged engineered plastic
- Individually powder coated components offer maximum protection from premature corrosion
- The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight
- Widened ratchet and latch pawl design greatly reduces wear and increases service life
- The industrial-grade drive spring completely containerized and permanently sealed
- Inlet hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Guide arm adjusts to seven positions



RT650-OLP

New Spool Material and Design!



Dimensions		
	in	mm
A	17 ⁷ / ₈	454
B	16 ¹ / ₂	419
C	6	152
D	2 ¹ / ₄	57
E	See Chart	

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	E	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	in	mm
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)															
RT425-OLP	19	9	1/4	6	.475	12	25	8	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT435-OLP	21	10	1/4	6	.475	12	35	11	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT450-OLP	24	11	1/4	6	.475	12	50	15	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT465-OLP	25	11	1/4	6	.475	12	65	20	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT625-OLP	20	9	3/8	10	.600	15	25	8	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT635-OLP	21	10	3/8	10	.600	15	35	11	300	21	1/4	3/8	1/4	6 ¹ / ₄	159
RT650-OLP*	27	12	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/4	6 ¹ / ₄	159
RT825-OLP	26	12	1/2	13	.750	19	25	8	300	21	1/2	1/2	1/2	6 ¹ / ₄	159
RT835-OLP	27	12	1/2	13	.750	19	35	11	300	21	1/2	1/2	1/2	6 ¹ / ₄	159
RT850-OLP	37	17	1/2	13	.750	19	50	15	300	21	1/2	1/2	1/2	7 ³ / ₄	197
Medium Pressure Oil Reels Maximum Temperature 150 °F (65 °C)															
RT650-OMP	35	16	3/8	10	.710	18	50	15	1000	69	3/8	1/2	1/2	7 ³ / ₄	197
RT825-OMP	31	14	1/2	13	.820	21	25	8	1000	69	1/2	1/2	1/2	6 ¹ / ₄	159
RT835-OMP	32	15	1/2	13	.820	21	35	11	1000	69	1/2	1/2	1/2	6 ¹ / ₄	159

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose or equivalent. *Side mount configuration available; visit reelcraft.com for more information.

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	E	
			I.D.		O.D.		Length							
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	mm
Low Pressure Air/Water Reels			Maximum Temperature 150 °F (65 °C)											
RT405-OLP	21	10	1/4	6	.475	12	50	15	300	21	3/8	1/4	6 ¹ / ₄	159
RT602-OLP	19	9	3/8	10	.600	15	25	8	300	21	3/8	1/4	5 ³ / ₄	146
RT605-OLP	22	10	3/8	10	.600	15	50	15	300	21	1/2	1/4	6 ¹ / ₄	159
RT803-OLP	23	10	1/2	13	.750	19	35	11	300	21	1/2	1/2	6 ¹ / ₄	159
RT805-OLP	25	11	1/2	13	.750	19	50	15	300	21	1/2	1/2	7 ³ / ₄	197
Medium Pressure Oil Reels			Maximum Temperature 150 °F (65 °C)											
RT603-OMP	22	10	3/8	10	.710	18	35	11	1000	69	3/8	3/8	5 ³ / ₄	146
RT802-OMP	23	10	1/2	13	.820	21	25	8	1000	69	1/2	1/2	6 ¹ / ₄	159
RT803-OMP	23	10	1/2	13	.820	21	35	11	1000	69	1/2	1/2	6 ¹ / ₄	159



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, available parts, and accessories.



Pivot Bases & Swing Brackets
See page 43

Premium Duty Spring Retractable Hose Reels

Series 3000 - Air/Water - 1/4", 3/8" I.D.

- Ultra-compact for a wide range of bench mount or mobile applications with critical space requirements
- Compact size - reel easily fits within a 1 ft. x 1 ft. space
- Multiple slotted mounting holes to accommodate many configurations
- Inlet located on base eliminating the possibility of hose interfering with spool operation

NEW!



S602805 -
Optional guide
arm accessory

B3425 OLP

Additional Series 3000 Models

Cord Reels - Page 29

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air / Water Hose Reels Maximum temperature 150 °F (65 °C)													
B3425 OLP	18	8.2	1/4	6	.475	12	25	7.6	300	21	1/4	3/8	3/8
B3610 OLP	17	7.7	3/8	10	.600	15	10	3.0	300	21	1/4	3/8	3/8
B3620 OLP	18	8.2	3/8	10	.600	15	20	6.1	300	21	1/4	3/8	3/8
S602805	1.1	0.5	Optional guide arm accessory for multiple adjustment positions										
Low pressure reels furnished standard with PVC hose.													

Low pressure reels furnished standard with PVC hose.

Under Bench Mount		Dimensions	
		in	mm
	A	11 ³ / ₁₆	284
	B	11 ¹ / ₁₆	281
	C	6	152
	D	8	203
	E	4 ³ / ₁₆	106
	F	6	152
	G	2 ¹ / ₂	64

Premium Duty Spring Retractable Reels

Series 4000 - Air/Water - 1/4", 3/8" I.D.



- Compact for a wide range of applications with critical space requirements
- Guide arm adjusts to two positions
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel

Additional Series 4000 Models

Cord Reels - Page 29-32

Single Line Welding Reels - Page 34



4625 OLP

Series 4000 reels include a speed latch mechanism that uses a cam and disc for quiet operation. Series B4000 reels includes a ratchet latch mechanism that produces a distinct "clicking" noise while in use.

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		*Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C)													
4420 OLP	18	8	1/4	6	.475	12	20	6	300	21	1/4	3/8	1/4
4425 OLP	19	9	1/4	6	.475	12	25	8	300	21	1/4	3/8	1/4
B4425 OLP	19	9	1/4	6	.475	12	25	8	300	21	1/4	3/8	1/4
4435 OLP	19	9	1/4	6	.475	12	35	11	300	21	1/4	3/8	1/4
4615 OLP	19	9	3/8	10	.600	15	15	5	300	21	1/4	3/8	1/4
4617 OLP	19	9	3/8	10	.600	15	17	5	300	21	1/4	3/8	1/4
4625 OLP**	20	9	3/8	10	.600	15	25	8	300	21	1/4	3/8	1/4
B4625 OLP	20	9	3/8	10	.600	15	25	8	300	21	1/4	3/8	1/4

Low pressure reels supplied standard with PVC hose. See operating instructions for optimum mounting configuration. *Maximum working pressure at 70 °F (20 °C) **Side mount configuration available; visit reelcraft.com for more information.

Dimensions		in	mm
	A	12 ⁷ / ₈	327
	B	12 ⁵ / ₈	321
	C	8	203
	D	2 ¹ / ₂	64
	E	5 ⁵ / ₈	143



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, available parts, and accessories.



Pivot Bases & Swing Brackets

See page 43

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet
			I.D.		O.D.		Length					
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)												
4400 OLP	17	8	1/4	6	.475	12	35	11	500	35	3/8	1/4
4600 OLP	17	8	3/8	10	.600	15	25	8	500	35	3/8	1/4

Premium Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.



- Compact for a wide range of applications with critical space requirements
- Robotically welded steel base offers maximum strength and consistent quality
- Guide arm adjusts to two positions
- All steel components are powder coated for maximum corrosion resistance
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel



5650 OLP

Additional Series 5000 / 5005 Models

- Enclosed Reels** - Page 11
- S.S. Fluid Path** - Page 18
- Stainless Steel** - Page 19
- Twin Hydraulic** - Page 22
- Cord Reels** - Page 30-33
- Welding Gas** - Page 35



Side Mount Reels


Visit reelcraft.com/catalog for side mount reels.

Model with hose & bumper	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Max Pressure	NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
lbs	kg	in	mm	ft	m	psi	bar	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)									
5450 OLP	26 12	1/4 6	.475 12	50 15	300 21	1/4	3/8	1/4	1
B5450 OLP	26 12	1/4 6	.475 12	50 15	300 21	1/4	3/8	1/4	1
5450 OLP-HTH*	26 12	1/4 6	.475 12	50 15	300 21	1/4	3/8	1/4	1
5635 OLP	25 11	3/8 10	.600 15	35 11	300 21	1/4	3/8	1/4	1
B5635 OLP	25 11	3/8 10	.600 15	35 11	300 21	1/4	3/8	1/4	1
5650 OLP***	36 16	3/8 10	.600 15	50 15	300 21	1/4	3/8	1/4	2
B5650 OLP	36 16	3/8 10	.600 15	50 15	300 21	1/4	3/8	1/4	2
A5825 OLP	27 12	1/2 13	.750 19	25 8	300 21	1/2	3/8	1/2	1
B5825 OLP	27 12	1/2 13	.750 19	25 8	300 21	1/2	3/8	1/2	1
A5835 OLP	39 18	1/2 13	.750 19	35 11	300 21	3/8	3/8	1/2	2
A5850 OLP***	41 19	1/2 13	.750 19	50 15	300 21	1/2	3/8	1/2	3
B5850 OLP	41 19	1/2 13	.750 19	50 15	300 21	1/2	3/8	1/2	3
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)									
5630 OMP	31 14	3/8 10	.690 18	30 9	2600 179	3/8	3/8	3/8	1
A5825 OMP**	34 15	1/2 13	.820 21	25 8	3000 207	1/2	3/8	1/2	1
A5835 OMP	42 19	1/2 13	.820 21	35 11	3000 207	1/2	3/8	1/2	2
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)									
5430 OHP	30 14	1/4 6	.580 15	30 9	5000 345	1/4	1/4	1/4	1
5625 OHP	32 15	3/8 10	.730 19	25 8	4800 331	1/4	1/4	1/4	1

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. *Model is supplied with low pressure, rubber hose for temperatures up to 212 °F (not for use with water above 180 °F). **Floor or tank mount only - Do NOT mount on ceiling. ***Side mount configuration available; visit reelcraft.com for more information.

Dimensions						
	1		2		3	
	in	mm	in	mm	in	mm
A	14 ³ / ₈	365	17 ⁵ / ₈	448	17 ⁵ / ₈	448
B	13 ³ / ₄	349	16 ³ / ₄	425	16 ³ / ₄	425
C	9 ³ / ₄	248	9 ³ / ₄	248	9 ³ / ₄	248
D	2 ¹ / ₂	64	2 ¹ / ₂	64	2 ¹ / ₂	64
E	6 ¹ / ₈	156	5 ⁷ / ₈	149	7 ¹ / ₄	184

The technical drawing shows a circular component with a flange. Dimension A is the total height. Dimension B is the outer diameter of the flange. Dimension C is the diameter of the central mounting area. Dimension D is the height of the mounting tabs. Dimension E is the total width of the base. There are four mounting tabs, each with a diameter of 0.343 inches. The drawing includes a cross-section view of the base and a top view of the flange.



Series 5000/5005 and A5000/A5005 reels include a speed latch mechanism that uses a cam and disc for quiet operation.

Series B5000/B5005 reels includes a ratchet latch mechanism that produces a distinct "clicking" noise while in use.

See operating instructions for optimum mounting configuration.

Model without hose & bumper	Shipping Weight	Hose Capacity				Max Pressure	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
lbs	kg	I.D.	O.D.	Length		psi	bar	in	in
in	mm	in	mm	ft	m				
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)									
5400 OLP	20 9	1/4 6	.475 12	50 15	500 35	3/8	1/4	1/4	1
5600 OLP	21 10	3/8 10	.600 15	35 11	500 35	3/8	1/4	1/4	1
5605 OLP	21 10	3/8 10	.600 15	50 15	500 35	3/8	1/4	1/4	2
A5800 OLP	22 10	1/2 13	.750 19	25 8	500 35	3/8	1/2	1/2	1
A5806 OLP	35 16	1/2 13	.750 19	50 15	500 35	3/8	1/2	1/2	3
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)									
5400 OMP	23 10	1/4 6	.530 13	35 11	3000 207	3/8	3/8	3/8	1
5600 OMP	24 11	3/8 10	.690 18	30 9	3000 207	3/8	3/8	3/8	1
A5800 OMP**	24 11	1/2 13	.820 21	25 8	3000 207	3/8	1/2	1/2	1
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)									
5400 OHP	23 10	1/4 6	.580 15	30 9	5000 345	1/4	1/4	1/4	1



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, available parts, and accessories.



Pivot Bases & Swing Brackets

See page 43

Premium Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2", 3/4" I.D.

- Retracts at 2 miles per hour – designed to match the average human walking speed of 2 to 3 miles per hour
- Integral clutch creates a consistent retraction speed regardless of fluid or environmental temperatures
- Safely protects personnel and equipment



NEW!
Controlled
Return Hose Reel
REELSAFE




RS7650 OLP

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)													
RS7650 OLP	46	21	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2
RS7670 OLP	50	23	3/8	10	.600	15	70	22	300	21	1/4	1/2	1/2
RS7850 OLP	50	23	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2
RS7925 OLP	50	23	3/4	19	1.075	27	25	8	250	17	3/4	3/4	3/4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
RS7650 OMP	58	26	3/8	10	.690	18	50	15	2600	179	3/8	1/2	1/2
RS7850 OMP	60	27	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1/2
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)													
RS7450 OHP	58	26	1/4	6	.580	15	50	15	5000	345	1/4	1/2	1/2
RS7650 OHP	63	29	3/8	10	.730	19	50	15	4800	331	1/4	1/2	1/2

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Dimensions					
	A	B	C	D	E
in	20 1/4	19 3/4	7 13/16	3 7/8	7
mm	514	502	198	98	178



Model without hose & bumper	Shipping Weight		Hose Capacity			Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	I.D.	O.D.	Length	psi	bar	in	in
			in	mm	ft				
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)									
RS7800 OLP	44	20	1/2	13	.750	19	50	15	500 35 1/2 1/2
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)									
RS7600 OMP	46	21	3/8	10	.690	18	50	15	3000 207 1/2 1/2
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)									
RS7400 OHP	46	21	1/4	6	.580	15	50	15	5000 345 1/2 1/2
RS7600 OHP	49	27	3/8	10	.730	19	50	15	5000 345 1/2 1/2



**Interactive
Reel Catalog**

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.




**Pivot Bases &
Swing Brackets**
See page 43

Premium Duty Enclosed Hose Reels

Air/Water - 1/4", 3/8", 1/2" I.D.

- Features a steel enclosure that offers an additional level of protection for the hose
- Remove the cover on either side for easy access



	1		2	
	in	mm	in	mm
A	15	381	20 7/8	530
B	16 1/4	413	21 1/8	537
C	9 3/4	248	7 13/16	198
D	2 1/2	64	3 7/8	98
E	7	178	7 5/8	194

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)														
5450 ELP	37	17	1/4	6	.475	12	50	15	300	21	1/4	3/8	1/4	1
5635 ELP	36	16	3/8	10	.600	15	35	11	300	21	1/4	3/8	1/4	1
7650 ELP	63	29	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2	2
7670 ELP	68	31	3/8	10	.600	15	70	22	300	21	1/4	1/2	1/2	2
HD76050 ELP	63	29	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2	2
HD76070 ELP	66	30	3/8	10	.600	15	70	21	300	21	1/4	1/2	1/2	2
A5825 ELP	39	18	1/2	13	.750	19	25	8	300	21	1/2	3/8	1/2	1
7850 ELP	74	34	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2	2



5450 ELP

Premium Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2", 3/4" I.D.

- Robust and ideal for the most demanding applications
- Individually powder coated components offer maximum protection from premature corrosion
- Full flow swivel combines the highest grade seal design and materials with bearing areas for maximum service life
- Base and guide arm are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel
- Guide arm adjusts to seven positions



7650 OLP



Additional Series 7000 Models

- | | |
|----------------------------------|---------------------------------------|
| Enclosed Reels - Page 11 | Pressure Wash - Page 23 |
| Stainless Steel - Page 19 | Garden Reels - Page 24 |
| Fuel/DEF - Page 20-21 | Cord Reels - Page 30 |
| Twin Hydraulic - Page 22 | Gas/Cable Welding - Page 34-37 |



7600 OLP



7850 CLP



7650 OLP

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)													
7650 OLP	43	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2
7670 OLP	47	21	3/8	10	.600	15	70	22	300	21	1/4	1/2	1/2
7850 OLP	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2
7850 CLP*	57	26	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2
7850 OLP121	47	21	1/2	13	.750	19	50	15	300	21	1/2	1/2	1/2
7925 OLP	47	21	3/4	19	1.075	27	25	8	250	17	3/4	3/4	3/4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
7650 OMP	55	25	3/8	10	.690	18	50	15	2600	179	3/8	1/2	1/2
7850 OMP	57	26	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1/2
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)													
7450 OHP	55	25	1/4	6	.580	15	50	15	5000	345	1/4	1/2	3/8
7650 OHP	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	3/8
Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. *Cabinet style reel - guide arm not included; inlet hose is included													

Dimensions					
	A	B	C	D	E
in	20 1/4	19 3/4	7 13/16	3 7/8	7
mm	514	502	198	98	178

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet
			I.D.		O.D.		Length					
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in
Low Pressure Air/Water Reels			Maximum Temperature 210 °F (99 °C)									
7600 OLP	40	18	3/8	10	.600	15	50	15	500	35	1/2	1/2
7607 OLP	40	18	3/8	10	.600	15	70	22	500	35	1/2	1/2
7800 OLP	41	19	1/2	13	.750	19	50	15	500	35	1/2	1/2
7900 OLP	44	20	3/4	19	1.075	27	25	8	500	35	3/4	3/4
Medium Pressure Oil Reels			Maximum Temperature 210 °F (99 °C)									
7600 OMP	43	20	3/8	10	.690	18	50	15	3000	207	1/2	1/2
7800 OMP	43	20	1/2	13	.820	21	50	15	3000	207	1/2	1/2
High Pressure Grease Reels			Maximum Temperature 210 °F (99 °C)									
7400 OHP	43	20	1/4	6	.580	15	50	15	5000	345	1/2	3/8
7600 OHP	46	21	3/8	10	.730	19	50	15	5000	345	1/2	3/8

NEW!

Reel Covers

See page 41



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Pivot Bases & Swing Brackets

See page 43

Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2", 3/4" I.D.

- Compact design - reels are 25% smaller than our Series 80000 reels
- Redesigned latching mechanism provides longer service life of the latch components
- Guide arm adjusts to seven positions
- Containerized drive spring offers easier handling during maintenance (size index 2 models only)
- High quality, die-cast aluminum hub and two sealed ball bearings produce a smoother spool rotation and easier operation



HD76100 OLP



HD78005 OLP

Additional Series HD70000 Models

Enclosed Reels - Page 11 **Pressure Wash** - Page 23
S.S. Fluid Path - Page 18 **Cord Reels** - Page 29-31
Fuel/DEF - Page 20-21 **Welding Gas** - Page 34-35
Twin Hydraulic - Page 22




Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)														
HD76050 OLP	45	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2	1
HD76070 OLP	49	22	3/8	10	.600	15	70	21	300	21	1/4	1/2	1/2	1
HD76075 OLP	65	29	3/8	10	.600	15	75	23	300	21	1/4	1/2	1/2	2
HD76100 OLP	75	34	3/8	10	.600	15	100	30	300	21	1/4	1/2	1/2	2
HD78050 OLP	49	22	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2	1
HD78075 OLP	73	33	1/2	13	.750	19	75	23	300	21	3/8	1/2	1/2	2
HD79025 OLP	49	27	3/4	19	1.075	27	25	8	250	17	3/4	3/4	3/4	1
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)														
HD76050 OMP	57	26	3/8	10	.690	18	50	15	2600	179	3/8	1/2	1/2	1
HD76075 OMP	85	39	3/8	10	.690	18	75	23	2600	179	3/8	1/2	1/2	1
HD78050 OMP	59	27	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1/2	1
HD78065 OMP	78	35	1/2	13	.820	21	65	20	3000	207	1/2	1/2	1/2	2
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)														
HD74050 OHP	57	26	1/4	6	.580	15	50	15	5000	345	1/4	1/2	3/8	1
HD74075 OHP	80	36	1/4	6	.580	15	75	23	5000	345	1/4	1/2	3/8	2
HD74100 OHP	86	39	1/4	6	.580	15	100	30	5000	345	1/4	1/2	3/8	2
HD76050 OHP	62	28	3/8	10	.730	19	50	15	4800	331	1/4	1/2	3/8	1
HD76075 OHP	90	41	3/8	10	.730	19	75	23	4800	331	1/4	1/2	3/8	2
Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.														

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
			I.D.		O.D.		Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
Low Pressure Air/Water Reels			Maximum Temperature 210 °F (99 °C)										
HD76000 OLP	42	19	3/8	10	.600	15	70	21	500	35	1/2	1/2	1
HD76005 OLP	56	25	3/8	10	.600	15	100	30	500	35	1/2	1/2	2
HD78000 OLP	43	20	1/2	13	.750	19	50	15	500	35	1/2	1/2	1
HD78005 OLP	58	26	1/2	13	.750	19	75	23	500	35	1/2	1/2	2
Medium Pressure Oil Reels			Maximum Temperature 210 °F (99 °C)										
HD78000 OMP	43	20	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1
High Pressure Grease Reels			Maximum Temperature 210 °F (99 °C)										
HD74005 OHP	60	27	1/4	6	.580	15	100	30	5000	345	1/2	3/8	2
HD76005 OHP	60	27	3/8	10	.730	19	75	23	5000	345	1/2	3/8	2

Dimensions - Size Index				
	1		2	
	in	mm	in	mm
A	20 1/4	514	20 1/4	514
B	19 3/4	502	19 3/4	502
C	7 13/16	198	7 13/16	198
D	3 7/8	98	3 7/8	98
E	7	178	8 1/4	210

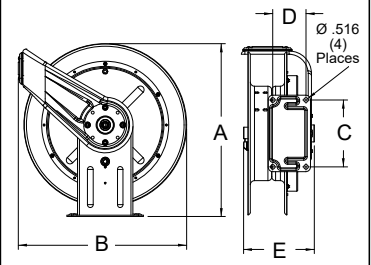

NEW!
Reel Covers

See page 41



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Pivot Bases & Swing Brackets

See page 43

Premium Duty Spring Retractable Reels

Air/Water/Oil/Grease - 3/8", 1/2", 3/4", 1" I.D.

- Dual pedestal base and guide arm design are structurally reinforced
- Five-in-one, heat-treated aluminum casting incorporates main shaft, ratchet, spring arbor, and inlet/outlet plumbing in one-piece casting
- Containerized spring assembly provides safer and easier handling during maintenance
- Two sealed ball bearings for smooth rotation of main shaft



82100 OLP

Additional Series 80000 / D80000 Models

Stainless Steel - Page 19

Garden Reels - Page 24

Fuel/DEF - Page 20-21

Welding Gas - Page 35

Twin Hydraulic - Page 22

Welding Cable - Page 37

Pressure Wash - Page 23

NEW!

Reel Covers

See page 41




Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Low Pressure Air/Water Reels			Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)											
81075 OLP	76	34	3/8	10	.600	15	75	23	300	21	3/8	1/2	1/2	1
81100 OLP	82	37	3/8	10	.600	15	100	30	300	21	3/8	1/2	1/2	1
82075 OLP	87	39	1/2	13	.750	19	75	23	300	21	1/2	1/2	1/2	1
82100 OLP	95	43	1/2	13	.750	19	100	30	300	21	1/2	1/2	1/2	1
83050 OLP	88	40	3/4	19	1.075	27	50	15	250	17	3/4	3/4	3/4	1
D83075 OLP	102	46	3/4	19	1.075	27	75	23	250	17	3/4	3/4	3/4	2
D84035 OLP	97	44	1	25	1.375	35	35	11	250	17	3/4	1	1	3
D84050 OLP	103	47	1	25	1.375	35	50	15	250	17	3/4	1	1	3
Medium Pressure Oil Reels			Maximum Temperature 210 °F (99 °C)											
82075 OMP	101	46	1/2	13	.850	22	75	23	2000	138	1/2	1/2	1/2	1
82100 OMP	109	49	1/2	13	.850	22	100	30	3000	207	1/2	1/2	1/2	1
83050 OMP	98	44	3/4	19	1.188	30	50	15	1250	86	3/4	3/4	3/4	1
D84050 OMP	122	55	1	25	1.400	36	50	15	1275	88	1	1	1	3
High Pressure Grease Reels			Maximum Temperature 210 °F (99 °C)											
81075 OHP	111	50	3/8	10	.730	19	75	23	4800	331	3/8	3/8	3/8	1
81100 OHP	127	58	3/8	10	.730	19	100	30	4800	331	3/8	3/8	3/8	1
Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.														

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
			I.D.		O.D.		Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)													
81000 OLP	77	35	3/8	10	.600	15	100	30	500	35	1/2	1/2	1
82000 OLP	82	37	1/2	13	.750	19	100	30	500	35	1/2	1/2	1
83000 OLP	77	35	3/4	19	1.075	27	50	15	500	35	3/4	3/4	1
D83000 OLP	83	38	3/4	19	1.075	27	75	23	500	35	3/4	3/4	2
D84000 OLP	91	41	1	25	1.375	35	50	15	500	35	1	1	3
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
82000 OMP	82	37	1/2	13	.850	22	100	30	3000	207	1/2	1/2	1
83000 OMP	84	38	3/4	19	1.188	30	50	15	1500	103	3/4	3/4	1
D84000 OMP	86	39	1	25	1.400	36	50	15	1500	103	1	1	3
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)													
81000 OHP	85	39	3/8	10	.730	19	100	30	5000	345	3/8	3/8	1

Dimensions - Size Index						
	1		2		3	
	in	mm	in	mm	in	mm
A	25 ³ / ₈	645	25 ³ / ₈	645	25 ³ / ₈	645
B	24	610	24	610	24	610
C	10	254	10 ¹ / ₂	267	10 ¹ / ₂	267
D	6	152	7 ⁷ / ₈	200	7 ⁷ / ₈	200
E	10 ¹ / ₂	267	13	330	15 ³ / ₄	400
F	8 ¹ / ₈	206	10 ³ / ₈	264	10 ³ / ₈	264

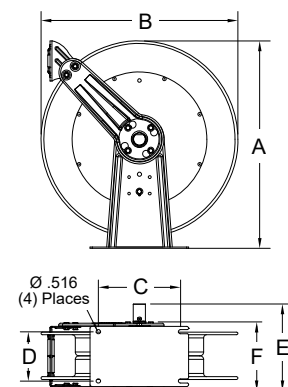

Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.




Pivot Bases & Swing Brackets

See page 43

Ultimate Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

- Features an innovative, non-welded, interlocking base that increases the strength while utilizing fewer parts
- Independent testing to military standards has proven the reels stand up to heavy vibration, which makes them especially strong and ideal for truck-mounted applications
- Superbly engineered dual pedestal base and guide arm are structurally reinforced
- Torsion style latch spring life far exceeds that of conventional coil springs

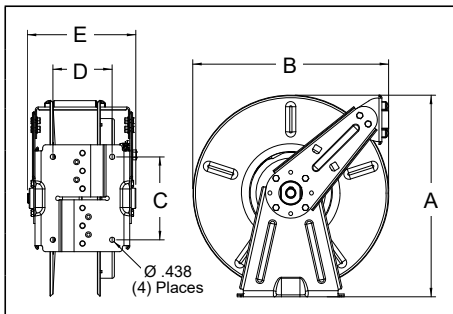

Dimensions - Size Index											
	1		2		3		4				
	in	mm	in	mm	in	mm	in	mm			
A	16 ³ / ₈	416	16 ³ / ₈	416	17	432	17	432			
B	14 ³ / ₈	365	14 ³ / ₈	365	16 ¹ / ₂	419	16 ¹ / ₂	419			
C	7	178	7	178	7	178	7	178			
D	4	102	5	127	4	102	5	127			
E	8	203	9	229	8	203	9	229			

**Meets or exceeds
military vibration for
Truck Transport test**

MIL-STD-810F
500,000 mile equivalent

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)														
DP5435 OLP	34	15	1/4	6	.475	12	35	11	300	21	1/4	1/2	3/8	1
DP5450 OLP	37	17	1/4	6	.475	12	50	15	300	21	1/4	1/2	3/8	1
DP5635 OLP	41	19	3/8	10	.600	15	35	11	300	21	1/4	1/2	1/2	1
DP5650 OLP	44	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2	2
DP7650 OLP	50	23	3/8	10	.600	15	50	15	300	21	1/4	1/2	1/2	3
DP5835 OLP	52	24	1/2	13	.750	19	35	11	300	21	3/8	1/2	1/2	2
DP7850 OLP	53	24	1/2	13	.750	19	50	15	300	21	3/8	1/2	1/2	4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)														
DP7650 OMP	55	25	3/8	10	.690	18	50	15	2600	179	3/8	1/2	1/2	3
DP7850 OMP	64	29	1/2	13	.820	21	50	15	3000	207	1/2	1/2	1/2	4
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)														
DP7450 OHP	59	27	1/4	6	.580	15	50	15	5000	345	1/4	1/2	3/8	3
DP5635 OHP	43	20	3/8	10	.730	19	35	11	4800	331	3/8	1/2	3/8	2
DP7650 OHP	65	29	3/8	10	.730	19	50	15	4800	331	1/4	1/2	3/8	3
Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.														

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1-AT (3/8") or S.A.E. 100R17 (1/2") one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose.

Model without hose & bumper	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
			I.D.		O.D.		Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)													
DP7800 OLP	45	20	1/2	13	.750	19	50	15	500	35	1/2	1/2	4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
DP7600 OMP	45	20	3/8	10	.690	18	50	15	3000	207	1/2	1/2	3
DP7800 OMP	45	20	1/2	13	.820	21	50	15	3000	207	1/2	1/2	4

Features

- **Superior corrosion-resistance** - A double adhesive gasket seals the spring case.
- **Ease of operation** - The latch pawl is mounted on the guide arm to prevent latch out at full extension.



**Interactive
Reel Catalog**

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



**Pivot Bases &
Swing Brackets**
See page 43

Ultimate Duty Spring Retractable Reels

Air/Water/Oil - 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.


- Ideal for service trucks, permanent service, or plant work areas
- Substantial base frame – full width frame has the greatest amount of mounting area and overall strength of reels within its class
- Latch and ratchet are made of heavy duty cast aluminum to limit the opportunity for premature wear
- Reels are shipped in the bottom wind position with right hand inlet; see Hose Guide Roller Position for other options



E9350 OLPBW

****Series G9000 reels have an external drive spring and a removable gooseneck.**

	Size Index									
	1		2		3		4		5	
	in	mm	in	mm	in	mm	in	mm	in	mm
A	26 3/8	670	26 3/8	670	26 1/4	667	26 1/4	667	26 3/8	670
B	26 1/4	667	26 1/4	667	25	635	25	635	26 1/4	667
C	22 1/4	565	21 15/16	557	22	559	22	559	22 1/4	565
D	7 3/4	197	7 3/4	197	8	203	9 1/2	241	13 1/2	343
E	12	305	13 3/8	340	17 1/4	438	17 1/4	438	17 3/4	451
F	24 1/8	613	24 1/8	613	24 1/4	616	24 1/4	616	24 1/8	613
G	4 3/4	121	4 1/2	114	3 7/8	98	3 7/8	98	3 7/8	98

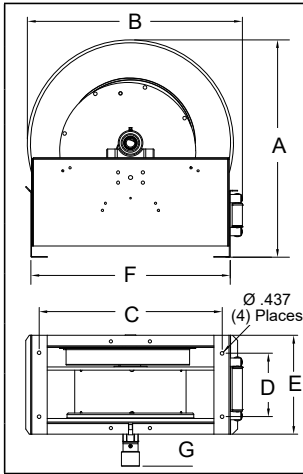

Model with hose & bumper	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Max Pressure	NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs kg	in mm	in mm	ft m	psi bar	in	in	in	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)									
E9299 OLPBW	127 58	1/2 13	.750 19	100 30	300 21	1/2	1/2	1/2	1
E9350 OLPBW	140 64	3/4 19	1.075 27	50 15	250 17	3/4	3/4	3/4	1
E9375 OLPBW	152 69	3/4 19	1.075 27	75 23	250 17	3/4	3/4	3/4	1
E9399 OLPBW	143 65	3/4 19	1.075 27	100 30	250 17	3/4	3/4	3/4	2
E9450 OLPBW	157 71	1 25	1.375 35	50 15	250 17	3/4	1	1	1

Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)									
E9275 OMPBW	131 59	1/2 13	.820 21	75 23	3000 207	1/2	1/2	1/2	1
E9350 OMPBW	142 64	3/4 19	1.188 30	50 15	1250 86	3/4	3/4	3/4	1

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R17 (1/2") OR S.A.E. 100R1-AT (3/4") one wire braid hose.

Model without hose & bumper	Shipping Weight	Hose Capacity			Max Pressure	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs kg	I.D.	O.D.	Length	psi bar	in	in	
		in mm	in mm	ft m				
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)								
E9200 OLPBW	115 52	1/2 13	.750 19	75 23	500 35	1/2	1/2	1
E9305 OLPBW	115 52	3/4 19	1.075 27	100 30	500 35	3/4	3/4	2
E9400 OLPBW	115 52	1 25	1.375 35	50 15	500 35	1	1	1
G9600 OLPBW	157 71	1 1/2 38	2.000 51	50 15	600 41	1 1/2	1 1/2	4

Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)								
E9200 OMPBW	117 53	1/2 13	.820 21	75 23	3000 207	1/2	1/2	1
E9300 OMPBW	117 53	3/4 19	1.188 30	50 15	3000 207	3/4	3/4	1
G9300 OMPBW	160 73	3/4 19	1.188 30	75 23	3000 207	3/4	1	3
E9400 OMPBW	120 54	1 25	1.480 38	50 15	3000 207	1	1	1
G9400 OMPBW	159 72	1 25	1.480 38	75 23	3000 207	1	1	3

Additional Series 9000 Models


S.S. Fluid Path - Page 18

Stainless - Page 19

Fuel/DEF - Page 20-21

Twin Hydraulic - Page 22

Hose Guide Roller Position

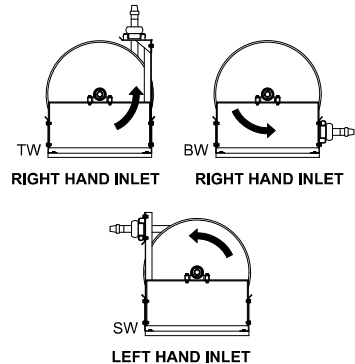

Reels are shipped in the bottom wind (BW) position. Kits are available for top wind (TW) and side wind (SW) position. Contact Reelcraft for more information.



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Hose Assemblies & Bumper Stops

See page 40

Spring Retractable Low Profile Reels

Air/Water/Oil/Vacuum Recovery - 3/4", 1" I.D.

- Designed to facilitate larger diameter 3/4 in. and 1 in. hose up to 50 ft.
- Features a high-quality external drive spring and a heavy gauge all-bolted together frame
- Stainless latch spring and widened aluminum ratchet/pawl
- Corrosion-resistant powder coat paint
- High impact HDPE guide rollers
- 1 3/8 in. solid main shaft
- Four 5/8 in. tie rods maintain reel integrity and provide added support
- Containerized external drive spring assembly offers easier handling during maintenance
- Ductile iron fluid path parts
- Torsion spring for longer service life
- Most compact reel in its class



SD13050 OLP



		Size Index			
		1		2	
		in	mm	in	mm
A	18 1/4	464	18 1/4	464	
B	19 1/8	486	19 1/8	486	
C	14	356	14	356	
D	11 1/4	286	13 1/4	337	
E	18 3/4	476	20 3/4	527	
F	8	203	10	254	

All models are bottom wind unless otherwise specified. Contact Reelcraft for additional bracket required for other guide arm positions.

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure	NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)													
SD13035 OLP	95	43	3/4	19	1.188	30	35	11	250	17	3/4	1	3/4
SD13050 OLP	105	48	3/4	19	1.188	30	50	15	250	17	3/4	1	3/4
SD14050 OLP	125	57	1	25	1.375	35	50	15	250	17	3/4	1	2
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
SD13035 OMP	95	43	3/4	19	1.188	30	35	11	1250	86	3/4	1	3/4
Vacuum Recovery Reels Maximum Temperature 210 °F (99 °C)													
SD13035 OVP	95	43	3/4	19	1.260	32	35	11	28 Hg~300 psi		3/4	1	3/4
SD13050 OVP	105	48	3/4	19	1.260	32	50	15	28 Hg~300 psi		3/4	1	3/4
SD14035 OVP	102	46	1	25	1.496	38	35	11	28 Hg~300 psi		1	1	1
SD14050 OVP	125	57	1	25	1.496	38	50	15	28 Hg~300 psi		1	1	2

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R1 one wire braid hose. Vacuum recovery reel capacities based on using SAE 100 R4 hose or equivalent.

Model without hose & bumper	Shipping Weight		Hose Capacity			Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	I.D.	O.D.	Length	psi	bar	in	in	
			in	mm	ft					
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)										
SD13000 OLP	85	39	3/4	19	1.188	30	500	35	1	3/4
SD14000 OLP	85	39	1	25	1.375	35	500	35	1	1



SD13000 OLP

Additional Series SD10000 Models

Fuel Reels - Page 20

- Extreme space saving design, ideal for applications with minimal space constraints
- Built with high quality, industrial grade components for superior strength



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Hose Assemblies & Bumper Stops

See page 40

Spring Retractable & Hand Crank Hose Reels

Air/Water - 1/2", 5/8", 3/4", 1" I.D.

Spring Retractable

- Models include outlet hose with brass on/off ball valve, bumper, and inlet hose providing a reel solution out of the box
- Comes equipped with garden hose end fittings
- Guide arm is easily adjustable to numerous positions
- All steel parts are individually powder-coated for maximum corrosion resistance
- Designed to be mounted centrally and used for watering and washdown
- Reel components are made from industrial grade steel

Hand Crank

- Ideal for longer lengths of hose and larger storage capacity
- All models include a 10 ft. inlet hose
- Designed to be mounted centrally and used for watering and washdown
- All steel parts are individually powder-coated for maximum corrosion resistance
- A 3/4 in. garden hose adapter for the outlet hose is included (except GCCB37118 L)
- Reel components are made from industrial grade steel



GCD83075 OLP



Hose Reel Carts & Trailers

See page 27



NEW! Reel Covers

See page 41



Roller Guide Assemblies

See page 43 for additional Series 30000 accessories



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Pivot Bases & Swing Brackets

See page 43



Hose Assemblies & Bumper Stops

See page 40

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		GH(M) Hose Outlet	GH(F) Reel Inlet	Inlet Hose (included)	Size Index Page	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in			
Spring Driven Water Hose Reels			Maximum temperature 150 °F (65 °C)												
7850 OLPSW57**	51	24	1/2	13	.810	21	50	15	300	21	3/4	1/2 NPT	-----	12	----
GC7850 OLP***	47	21	1/2	13	.750	19	50	15	300*	21	3/4	3/4	S601025-6	12	----
GC7535 OLP	53	24	5/8	16	1.00	26	35	11	200*	18	3/4	3/4	600830-10	12	----
GCD85100 OLP	101	46	5/8	16	1.00	26	100	31	250*	18	3/4	3/4	600830-10	14	3
GC7925 OLP	53	25	3/4	19	1.075	27	25	8	250*	18	3/4	3/4	600830-10	12	----
GC83050 OLP	89	41	3/4	19	1.075	27	50	15	250*	18	3/4	3/4	600830-10	14	1
GCD83075 OLP	102	46	3/4	19	1.075	27	75	23	250*	18	3/4	3/4	600830-10	14	2
GCD84050 OLP	103	47	1	25	1.375	35	50	15	250*	18	1	1	S600982-10	14	3

*Garden hose end fitting supplied on the outlet hose is rated to 150 PSI. **Does not include inlet hose; 50 ft. hose assembly is yellow and does not include ball valve. ***Does not include ball valve.

Model (does not include outlet hose)	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure		(M) Reel Outlet	(F) Reel Inlet	Inlet Hose (included)	Dimensions - Page 26					
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in		D		E		F	
														in	mm	in	mm	in	mm
Hand Crank Water Hose Reels Maximum temperature 150 °F (65 °C)																			
GCCA33112 L	47	21	3/4	19	1.075	27	100	31	300	21	3/4 GH	3/4 NPT	600830-10	15 ³ / ₄	400	25 ³ / ₄	654	12	305
GCCA33118 L	52	24	3/4	19	1.075	27	175	54	300	21	3/4 GH	3/4 NPT	600830-10	21 ³ / ₄	552	31 ³ / ₄	806	18	457
GCCB37118 L	55	25	1	25	1.375	35	100	31	300	21	1 NPT	1 NH	S600982-10	21 ³ / ₄	552	31 ³ / ₄	806	18	457

Light Duty Hand Crank Hose Reels

Air/Water - 3/8", 1/2" I.D.


- Designed for lighter-duty applications that require longer lengths of low pressure hose
- Incorporates a balanced brass swivel, brass inlet, lighter weight components, and forward-thinking design
- All reels feature a drag break to prevent de-spooling when reel is not in use



CU6050LN

Additional Series C Models
Pressure Wash Reels - Page 23

Dimensions								
	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	11½	292	11½	292	14⅜	365	14⅜	365
B	10½	267	10½	267	13¼	337	13¼	337
C	2	51	2	51	2⅜	60	2⅜	60
D	6⅝	168	11⅞	283	6¼	159	10¼	260
E	16¾	425	21⅞	537	16¾	425	20⅞	530
F	4	102	4	102	6	152	6	152
G	9⅜	238	13⅞	352	9¼	235	13¼	337
H	3⅜	86	3⅜	86	4	102	4	102

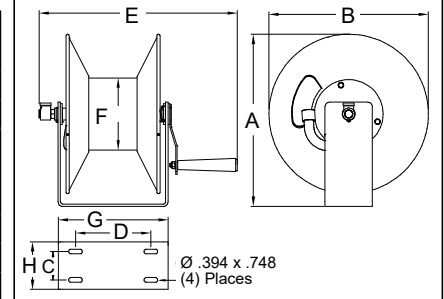

Model without hose	Shipping Weight		Hose Capacity						Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index Page	Size Index #	
			I.D.		O.D.		Length								
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in			
Low Pressure Air/Water Reels														Maximum Temperature 150 °F (65 °C)	
CU6050LN	12	5	3/8	10	.600	15	50	15	300	21	3/8	3/8	----	1	
CT6050LN	13	6	3/8	10	.600	15	50	15	300	21	3/8	3/8	23	1	
CU6100LN	16	7	3/8	10	.600	15	100	30	300	21	1/2	1/2	----	2	
CT8050LN	13	6	1/2	13	.750	19	50	15	300	21	1/2	1/2	----	3	
CU8050LN	13	6	1/2	13	.750	19	50	15	300	21	1/2	1/2	23	1	
CU8100LN	20	9	1/2	13	.750	19	100	30	300	21	1/2	1/2	----	4	

Medium Duty Hand Crank Hose Reels



Air/Water - 3/8", 1/2", 3/4" I.D.

- Economical reel designed for medium duty applications requiring long lengths of hose
- Suitable for plant or field use such as turf care, pest control, steam cleaning, and more
- The T-handle tensioning device allows proper tension to be applied to the spool
- Hand crank handle can easily be rotated out of the way by loosening the set screw
- Shipped completely assembled, ready to install


Additional Series H Models

Stainless Steel Reels - Page 19
Pressure Wash Reels - Page 23



H16000

Dimensions								
	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	19	483	19	483	18 ⁷ / ₈	479	20 ¹ / ₈	413
B	20	508	20	508	14	356	17 ³ / ₄	425
C	15	381	15	381	10	254	10	254
D	10	254	16	407	16	407	6 ³ / ₈	162
E	12 ¹ / ₂	318	18 ¹ / ₂	470	18 ¹ / ₂	470	5 ¹ / ₂	140
F	5 ³ / ₄	146	5 ³ / ₄	146	5 ³ / ₄	146	5 ³ / ₄	146
G	17 ³ / ₄	451	17 ³ / ₄	451	15 ³ / ₁₆	386	17 ³ / ₄	451

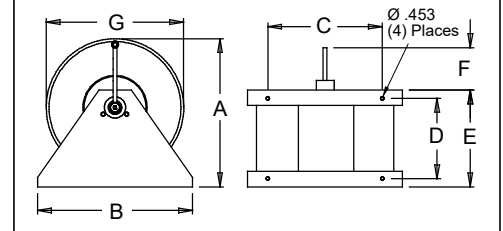

Model without hose	Shipping Weight		Hose Capacity						Max Pressure	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #	
			I.D.		O.D.		Length						
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in		in
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C)													
H16000	32	15	3/8	10	.600	15	300	91	500	35	3/8	1/4	1
H18000	34	15	1/2	13	.750	19	200	61	1000	69	1/2	1/2	1
H19000	33	15	3/4	19	1.075	27	105	32	1000	69	3/4	3/4	1
H29005	36	16	3/4	19	1.075	27	100	30	1000	69	3/4	3/4	3
H29000	41	19	3/4	19	1.075	27	150	46	1000	69	3/4	3/4	2
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
H16000 M	32	15	3/8	10	.710	18	300	91	3000	207	1/2	3/8	1
H18000 M	34	15	1/2	13	.850	22	200	61	3000	207	1/2	1/2	1
CAUTION: To prevent drum damage fully extend and pressurize hose and rewind on the reel.													

CAUTION: To prevent drum damage fully extend and pressurize hose and rewind on the reel.

Hand Crank and Motor Driven Reels

Series 30000 - Air/Water/Oil - 1/2", 3/4", 1" I.D.

- Designed for rugged applications requiring long lengths of hose and large storage capacity
- All-bolted unitized construction, full flow swivel and heavy gauge steel frame, spool, and drum ensure longest service life
- Vibration-proof, self-locking fasteners are ideal for industrial use
- Optional lock pin to prevent spool rotation when the reel is not in use, S600874



Removable gooseneck makes hose installation easy.



CA32112 L

Drive Type	Swivel Size	Width of Spool	Motor Voltage/H.P.
A - Air motor	2 - 1/2" (13 mm) I.D.	See "F" Dimension	Blank
B - Bevel crank	3 - 3/4" (19 mm) I.D.	06 - 6" (152 mm)	12D - 12 V DC
C - Hand crank	6 - 1/4" (6 mm) Dual	12 - 12" (305 mm)	4A - 1 1/2 HP air motor
E - Electric motor	7 - 1" (25 mm) I.D.	18 - 18" (457 mm)	
	8 - 1/2" (13 mm) I.D.		
	pressure wash		
Fluid Path Type			Pressure
A - Gooseneck			L - 1000 PSI (69 bar)
H - Heavy duty gooseneck (1" only)			M - 3000 PSI (207 bar)

NOTE: Chart is for reference only. Not all options available in every combination. Reels cannot be ordered by selecting from this chart.

Additional Series 30000 Models

Pressure Wash - Page 23

Welding Gas - Page 35

Garden Reels - Page 24

Welding Cable - Page 37

Hose I.D.	1/4"	3/8"	1/2"	3/4"	1"
	6 mm	10 mm	13 mm	19 mm	25 mm
Hose O.D.	.530"	.710"	.850"	1.188"	1.375"
	13 mm	18 mm	22 mm	30 mm	35 mm
"F" Width	Hose Capacity				
6"	200'	140'	100'	50'	N/A
(152 mm)	61 m	43 m	30 m	15 m	
12"	425'	300'	200'	100'	50'
(305 mm)	130 m	91 m	61 m	(30 m)	(15 m)
18"	625'	450'	325'	175'	100'
(457 mm)	191 m	137 m	(99 m)	(54 m)	(31 m)

Model without hose & bumper	Shipping Weight		Hose Capacity			Max Pressure		NPT(F) Reel Inlet	NPT(F) Reel Outlet	D		E		F	
	lbs	kg	I.D.	O.D.	Length	psi	bar	in	in	in	mm	in	mm	in	mm
Manual Hand Crank Hose Reels Maximum Temperature 210 °F (99 °C)															
CA32106 L	40	18	1/2 13	.750 19	100 30	1000	69	1/2	1/2	9 3/4	248	19 3/4	502	6	152
CA32112 L	46	21	1/2 13	.750 19	200 61	1000	69	1/2	1/2	15 3/4	400	25 3/4	654	12	305
CA32118 L	51	23	1/2 13	.750 19	325 99	1000	69	1/2	1/2	21 3/4	552	31 3/4	806	18	457
CA32106 M	42	19	1/2 13	.850 22	100 30	3000	207	1/2	1/2	9 3/4	248	19 3/4	502	6	152
CA32112 M	46	21	1/2 13	.850 22	200 61	3000	207	1/2	1/2	15 3/4	400	25 3/4	654	12	305
CA32118 M	52	24	1/2 13	.850 22	325 99	3000	207	1/2	1/2	21 3/4	552	31 3/4	806	18	457
CA33106 L	41	19	3/4 19	1.075 27	50 15	1000	69	3/4	3/4	9 3/4	248	19 3/4	502	6	152
CA33112 L	46	21	3/4 19	1.075 27	100 30	1000	69	3/4	3/4	15 3/4	400	25 3/4	654	12	305
CA33118 L	51	23	3/4 19	1.075 27	175 53	1000	69	3/4	3/4	21 3/4	552	31 3/4	806	18	457
CA33112 M	47	21	3/4 19	1.188 30	100 30	3000	207	3/4	3/4	15 3/4	400	25 3/4	654	12	305
CH37118 L*	64	29	1 25	1.375 35	100 30	1000	69	1	1	21 3/4	552	34 1/4	870	18	457
Electric Motor Driven Hose Reels Maximum Temperature 210 °F (99 °C)															
EA32112 L12D	64	29	1/2 13	.750 19	200 61	1000	69	1/2	1/2	15 3/4	400	23 7/8	606	12	305
EA32118 L12D	68	31	1/2 13	.750 19	325 99	1000	69	1/2	1/2	21 3/4	552	29 5/8	752	18	457
EA33106 L12D	63	29	3/4 19	1.075 27	50 15	1000	69	3/4	3/4	9 3/4	248	19 5/8	498	6	152
EA33112 L12D	68	31	3/4 19	1.075 27	100 30	1000	69	3/4	3/4	15 3/4	400	23 7/8	606	12	305
EA33118 L12D	68	31	3/4 19	1.075 27	175 53	1000	69	3/4	3/4	21 3/4	552	29 5/8	752	18	457
EH37118 L12D*	82	37	1 25	1.375 35	100 30	1000	69	1	1	21 3/4	552	31	787	18	457
Air Motor Driven Hose Reels Filter, regulator, lubricator required. Maximum Temperature 210 °F (99 °C)															
AA33106 L4A	59	27	3/4 19	1.075 27	50 15	1000	69	3/4	3/4	9 3/4	248	17 1/4	438	6	152

CAUTION: To prevent drum damage fully extend and pressurize hose and rewind on the reel. *All 1 in. reel models have an 8 in. (203 mm) diameter drum.

Many more reel models available in addition to chart. Refer to reelcraft.com for details.

Portable Hose Reel and Cart

- Series 30000 reels mounted on a portable cart are designed for rugged, heavy-duty applications requiring long lengths of hose and large storage capacity
- Helps to improve response time and reduce hose wear by storing them on a reel

Hose Reel and Cart Packages	
Package	Items Included
600965	12" hand crank hose reel (CA32112 L); 12" hand cart with pneumatic tires (600741-1); 10' inlet hose (600962)
600966	12" hand crank hose reel (CA32112 L); 12" hand cart with semi-pneumatic tires (600741-2); 10' inlet hose (600962)
600968	18" hand crank hose reel (CB37118 L); 18" hand cart with pneumatic tires (600885-1); 10' inlet hose (S600982-10)

Additional Hoses

Hose: 1" ID x 100', 1" NPT x 1" NPSH: **S600982-100**

Hose: 3/4" ID x 150', 3/4" NPT x 1" NPSH: **601044-150**


Inlet hose: 1" ID x 10', 1" NPT x 1" NPSH: **S600982-10**

Garden Fitting Conversion Kits

1/2" NPTM x 3/4" GH: **260729**

3/4" NPTM x 3/4" GH: **261702**

Note: Refer to page 26 for Series 30000 hose reel dimensions and specifications.

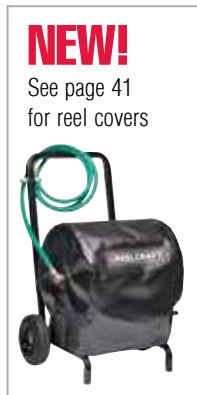

	Pneumatic	600741-1	600885-1
	Semi-Pneumatic	600741-2	600885-2
	Reel Size	12"	18"
		in mm	in mm
	A	Adjustable*	
	B	23 ³ / ₄ 603	28 ³ / ₄ 730
	C	18 ¹ / ₄ 464	18 ¹ / ₄ 464

*Handle height of cart is adjustable to 35⁵/₈", 38⁵/₈", 41¹/₂" or 44¹/₂". Eight 5/16" (8mm) diameter mounting holes.

Hose Reel and Trailer

- Rugged, self-contained hose reel trailer easily attaches to most off-road vehicles or carts
- Makes spot watering easier, quicker, and more convenient
- Pre-drilled for 12" or 18" Series 30000 hose reels

Hose Reel and Trailer Packages	
Package	Items Included
600911	Trailer (600810); Hand rewind hose reel (CB37118 L); 10' lead hose (S600982-10); Roller bracket, top wind (S602133-3)
600910	Trailer (600810); 12 V DC Motor driven hose reel (EB37118 L12D); Switch and bracket (S600808); Battery box, battery not included (S600812); Chain guard (S600518); Roller bracket, top wind (S602133-3); Roller bracket, bottom wind (S602132-3); 10' lead hose with 1" I.D. (S600982-10)
600810	Trailer only - does not include hose or reel. Reels designed for trailer include motor driven EB37118 L12D and hand crank CB37118 L. Trailer weight 154 lbs / 70 kg.



600910
(hose not included)

Trailer Accessories	
	S600812: Battery Box - Battery not included. Supplied with mounting hardware. Inside dimensions = 9" height x 14" width x 7 ¹ / ₂ " depth
	600814: Battery Cable Connector
	S600518: Chain Guard
	S600808: Operating Switch
See page 42 for switches, motors, and chain guards.	

Trailer Dimensions	
Trailer designed for off-road use only, not for passenger transport. Maximum weight capacity 400 pounds. Maximum speed 15 miles per hour. Trailer, reel, and accessories sold separately.	